

.

PFH060 Owner's Manual

Table of Contents

. Product Information 1
1.1 Specifications & Performance 1 1.2 Temperature Limits 2 1.3 Dimensions 2 1.4 Bill of Materials 3
2. Installation 4
2.1 Precautions .4 2.2 Warnings .5 2.3 Advantages .5 2.4 Environment & System .5 2.5 Installation Instructions .6
3. Control & Monitoring 7
3.1 Shift Logic for Fiber-optic Pumps .8 3.2 Fiber Optic Stroke Detection Installation .9 3.3 Calibrating D10 Amplifier for Stroke Detection .9 3.4 Conductivity Leak Detection Installation .10 3.5 Fiber Optic Leak Detection Installation .10 3.6 Calibrating D10 Amplifier for Leak Detection .11
I. Ordering Instructions 12
5. Pump Service 13
5.1 Rebuild Kits & Parts 13 5.2 Return Pump for Service 14
6. Warranty & Accessories 16

.





Dear valued customer.

Thank you for purchasing a White Knight PFH060 pump.

Our dedicated team designs products to meet your exacting specifications with a demonstrated commitment to quality that goes beyond mere words and fancy slogans.

Our patented designs offer a variety of size and material options to meet stringent requirements of high-pressure chemical delivery systems, hightemperature re-circulation processes, chemical reclaim and bulk transport applications, slurry systems, and more. Our safe, reliable products offer superior performance, optimized efficiency, and simplified maintenance.

White Knight is able to provide the highest quality fluid handling products through controlled, consistent in-house engineering and manufacturing. Through continued significant investments in engineering and manufacturing, we lead the industry with new technologies and products.

White Knight has received numerous awards for innovation and manufacturing programs. We rigorously manage our quality assurance processes to ensure consistency and reliability. Our quality controls include strict cleanliness procedures and consistent manufacturing processes. For example, high-purity product assembly, testing, and packaging is performed in a Class 100 cleanroom.

Please peruse this manual before installing your White Knight product. It details installation requirements and setup instructions, and provides additional information and accessories for enhanced functionality.

Our team has gone to great lengths to ensure our products serve your needs and meet your requirements.

Further, we provide the highest guality products at the best value, and we back them up with excellent warranties and world class support.

Thank you for your confidence and trust in White Knight products.

Sincerely,

White Knight Fluid Handling






1. Product Information

1.1 Specifications & Performance

Мос	odel PFH060		PFHSD060	
Max Flow Rate*		63.9 lpm (16.88 gpm)	64.5 lpm (17.04 gpm)	
Displacement Per Cycle*		0.216 liters (0.057 gal)	0.216 liters (0.057 gal)	
Cycles per min		318 max	279 max	
Air Connection		1/4 in	1/4 in	
Wei	ght	5.9 kg (12.96 lb)	5.9 kg (12.96 lb)	
Suc	tion Lift*	1 m (3 ft)	Flooded suction	
pu	Pressure**	82.74 dB(a) at 80 psi 50 CPM 82.61 dB(a) at 80 psi max CPM		
Sound	Power**	71.92 dB(a) at 80 psi 50 CPM 73.84 dB(a) at 80 psi max CPM		

* May vary by configuration or system. Suction lift diminishes over time. Recommended installation level less than 3 ft above source. To calculate displacement, divide flow rate by CPM. ** Sound measured in accordance with ISO9614-2:1997. *** Dry-run capable PFHSD060 pumps require flooded suction and may have reduced warranty. Contact support for details.

Max Fluid Temperature		145°C (293°F)	
Environmer Temperatur		min: 0°C (32°F) max: 50°C (122°F)	
Max Supply Air Pressur		5.5 Bar (80 psi)	
Min Startup Air Pressur		1.4 bar (20 psi)	
Fluid Path Materials		PTFE, PFA	
Non-Fluid F Materials	Path	PTFE, PFA	
Stroke Detection	Fiber optic with or without D10 sensor		
Leak Detection	Fiber optic with or without sensor, or conductivity		
Electronic	CPC, CPT, or custom.		

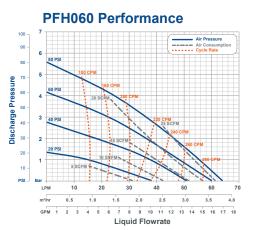


How to Read Charts

Draw a horizontal line at your discharge pressure and vertical line at desired flow rate. At line intersect, estimate required air pressure, resultant cycle rate and air consumption.

PFHSD060 Performance

Call for details.

Control




Example

At 2 Bar (30 psi) discharge pressure and 60 psi supply pressure, PFH060 pumps provide 36 lpm (9.8 gpm) flow rates. They would cycle at ~215 CPM and exhaust 19 SCFM of air.

*Graph is for reference only. Performance was measured utilizing 1/2 in (3/8 in ID) air line and 1-1/4 in (1-1/8 in ID) liquid lines with 1 ft flooded suction. Performance may vary in your system.






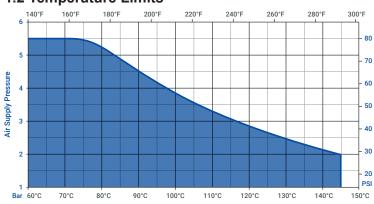



1.2 Temperature Limits


1.3 Dimensions

Dimensions in [mm] in











Copyright © 2023 White Knight Fluid Handling | A Graco company P: 435.783.6040 | support@wkfluidhandling.com | https://wkfluidhandling.com



8

1

5

.

OPTIONAL COMPONENT USE WITH SINGLE PROBE

STROKE DETECT

(23)

1.4 Bill of Materials

ltem	Part	Description	Qnty
1	1125-TE-0016	Pump Body	1
2	2127-TE-0025	Head, Right	1
3	2127-TE-0026	Head, Left	1
4	14300-PF-0015	Bellows Assembly, Dual Probe Single Detect	2
5	5144-PF-0023	Shaft	1
6	5143-MP-0012	Seal, Shaft	2
7	8100-PF-0002	Cap, End, Single Probe Dual Detect	2
8	4140-TE-0002	Top Check Plug	2
9	4135-MP-0001	Seat, Check, Bottom, Hi-flow	2
10	4142-MP-0001	Cage, Check, Top, Hi-flow	2
11	4100-MP-0001	Ball, Check, 3/4"	4
12	10040-TE-0003	Plug, Npt, 1/4"	2
13	10040-TE-0006	5/8" Plug Short	2
14	14200-NP-0005	Plate, Base, Assembly	1
15	7400-PF-0002	Insert, S-300®	2
16	7400-PF-0006	Nut, S-300®, 3/4"	2
17	7400-TE-0004	Body, S-300®, 3/4"	2
18	3200-VI-0001	Diaphragm, Ø.782	2
19	6150-UH-0001	Seat, QEV Exhaust	2
20	10080-VI-016-75	O-ring, 016 X .070	2
21	6140-FP-0002	Baffle Porous Poly L QEV	4
22	6140-PP-0004	Mesh, QEV 04 & 05	6
23	14300-MP-0030	Bellows Assembly, Single Probe Dual Detect	1
24	6090-UH-0003	QEH Body, 05	2
25	14700-XX-0006	Stroke Detect Fiber Optic Assembly with Wire Cutter	2
26	6150-NP-0007	Cap, Muffler, QEV 30L & 60L	2

East Detect Titlings (<i>Type, Size, Option</i>) Assemblies Body Intel Only (<i>Mid of ancludeii</i>) Leak Detect T12 in. F08 14510-PF-0004 7200-PF-0006 114 in. F12 14510-PF-0007 7200-PF-0006 114 in. F20 14510-PF-0007 7200-PF-0006 114 in. F12 14510-PF-0007 7200-PF-0008 114 in. F12 7120-PF-0008 F1400-X-0007 7200-PF-0008 114 in. F12 14530-PF-0007 7200-PF-0008 F1400-X-0008 F121 14600-X-0010 LF0 15 ft fiber optic cable with D10 amplifier F144 F12 14530-PF-003 7400-TE-0008 14600-X-0010 LF2 25 ft fiber optic cable with D10 amplifier F134									
Compatible 3/4 in. F12 14510-PF-0005 7200-PF-0006 1. I. F12 14510-PF-0005 7200-PF-0006 1. I. F12 14510-PF-0005 7200-PF-0006 1. I. F16 14510-PF-0007 7200-PF-0008 1. I. F16 7120-PF-0007 7200-PF-0008 1. Tube Out 1/2 in. T08 7120-PF-0007 1. T16 7120-PF-0007 7200-PF-0008 1. T100-PF-0007 7200-PF-0007 7120-PF-0007 1. T16 T120-PF-0007 7200-PF-0007 1. T16 T120-PF-0007 7200-PF-0007 1. T16 T120-PF-0007 7200-PF-0003 1. T16 T120-PF-0007 7200-PF-0003 1. T16 T120-PF-0004 7300-PF-0003 1. T16 T120-PF-0004 7300-PF-0003 1. T16 T150-PF-0004 7400-TE-0005 1. T1450-PF-0004 T16 T160	Y ° 0				Fittings (Ty	pe, Size, Op	ntion)	Assemblies	
Image: Second	0	1/1			Flaretek	1/2 in.	F08	14510-PF-0004	7200-PF-0005
Leak Detect File 14510-PF-0005 7200-PF-0007 1/1/4 in. F20 14510-PF-0007 7200-PF-0008 1/1/4 in. F20 14510-PF-0006 7200-PF-0008 1/1/4 in. F20 14510-PF-0006 7200-PF-0008 1/1/4 in. F20 14510-PF-0006 7120-PF-0006 1/1/4 in. F20 7120-PF-0006 1 1/1/4 in. F20 7120-PF-0001 1/1/4 in. 1/1/4 in. F20 7120-PF-0001 1/1/4 in. 1/1/4 in. F20 7120-PF-0001 1/1/4 in. 1/1/4 in. F20 7120-PF-0003 7400-TE-0003 1/4000-XX-001 LF0 15 ft fiber optic cable with no amplifier 1/1/4 in. F20 14530-PF-0003 7400-TE-0003 1/4000-XX-0012 LF3 25 ft fiber optic cable with no amplifier 1/1/4 in. F20 14530-PF-0003 7400-TE-0005 1/400-XX-004 LC1 25 ft fiber optic cable with no amplifier SFS0 1/1/4 in. F20 14530-PF-0008 7400-TE-0005 1/4700-XX-0022 SFS0]]			Compatible	3/4 in.	F12	14510-PF-0005	7200-PF-0006
Leak Detect Tube Out 1/2 ln. Tube P-0004 Adia T12 T120-PF-0004 3/4 in. T12 T120-PF-0005 Leak Detect Part NOT INCLUDED Main T12 T120-PF-0004 3/4 in. T12 T120-PF-0004 Main Part NOT INCLUDED Main T12 T120-PF-0001 T11/4 in. T20 T120-PF-0001 Main Part Description In. Wife Salo T300-PF-0003 T400-Xx-001 F1 T16 ft fiber optic cable with D10 amplifier M400-Xx-0010 LF1 T5 ft fiber optic cable with D10 amplifier T430 T450-PF-0003 T400-TE-0004 M400-Xx-0011 LF2 25 ft fiber optic cable with D10 amplifier T14/1 in. P12 H4530-PF-0003 T400-TE-0005 M400-Xx-0031 LC0 15 ft conductivity cable T11/4 in. P100-TE-0006 T10-TE-0006 M1700-Xx-0022 SF50 15 ft fiber optic cable with D10 amplifier SF50 T10-TE-0004 T10. T10.TE-0004 T10. T10-TE-0004 T10. T10.TE-0004 T10. T10.TE-00004 T10.		.)	010			1 in.	F16	14510-PF-0006	7200-PF-0007
Main Main <th< td=""><td></td><td></td><td>PVT</td><td></td><td>-0</td><td>1-1/4 in.</td><td>F20</td><td>14510-PF-0007</td><td>7200-PF-0008</td></th<>			PVT		-0	1-1/4 in.	F20	14510-PF-0007	7200-PF-0008
Image: Second		° /	7		Tube Out	1/2 in.	T08	7120-P	F-0004
Image: Construct of the optic cable with no amplifier Image: Construct of the optic cable with no amplifier 14600-XX-000 LFG 15 ft fiber optic cable with no amplifier 14600-XX-000 LFG 15 ft fiber optic cable with no amplifier 14600-XX-001 LF1 15 ft fiber optic cable with no amplifier 14600-XX-001 LF1 15 ft fiber optic cable with no amplifier 14600-XX-001 LF2 25 ft fiber optic cable with D10 amplifier 14600-XX-0012 LF3 25 ft fiber optic cable with D10 amplifier 14600-XX-004 LC1 25 ft fiber optic cable with D10 amplifier 14600-XX-004 LC1 25 ft fiber optic cable with D10 amplifier 14600-XX-004 LC1 25 ft fiber optic cable with no amplifier SFS1 14700-XX-0023 SFS0 15 ft fiber optic cable with D10 amplifier SFS1 14700-XX-0024 SFS2 25 ft fiber optic cable with D10 amplifier SFS1 14700-XX-0024 SFS2 25 ft fiber optic cable with D10 amplifier SFS1 14700-XX-0025 SFD0 15 ft fiber optic cable with D10 amplifier SFS1 14700-XX-0025 SFD0 15 ft fiber optic cable with D10 amplifier SFS1 14700-			(13)		0	3/4 in.	T12	7120-P	F-0005
Weldable 344 in. W12 7300-PF-0003 Leak Detect Part Description 1 W16 7300-PF-0003 14600-XX-0009 LF0 15 ft fiber optic cable with no amplifier 1460 1 1 W12 7300-PF-0003 14600-XX-0009 LF0 15 ft fiber optic cable with no amplifier 1 1 W16 7300-PF-0003 7400-TE-0003 14600-XX-0011 LF2 25 ft fiber optic cable with no amplifier 1 1 1 14530-PF-0003 7400-TE-0004 14600-XX-0011 LF2 25 ft fiber optic cable with no amplifier 1 1 1 1 1 7400-TE-0004 1 1 1 1 1 1 1 1 0 7400-TE-0004 1 1 1 1 1 0 1 0 1 0 1 1 0 1 0 1 0 1 0 1 0 1 1 1 1 1 1 1<			\bigcirc	OPTIONAL		1 in.	T16	7120-P	F-0006
Leak Detect 1 W16 7300-PF-0004 Part Description 1 1 W16 7300-PF-0023 7400-TE-0036 14600-XX-0010 LF1 15 ft fiber optic cable with 100 amplifier 1 1 W16 7300-PF-0024 7400-TE-0036 14600-XX-0010 LF2 25 ft fiber optic cable with D10 amplifier 1 1 PV16 14530-PF-0003 7400-TE-0006 14600-XX-0011 LF2 25 ft fiber optic cable with D10 amplifier 1 1 PV16 14530-PF-0008 7400-TE-0006 14600-XX-0012 LF3 25 ft fiber optic cable with D10 amplifier 1 1 N06 7100-TE-0006 14600-XX-0040 LC1 25 ft conductivity cable 1 N06 7100-TE-0006 14700-XX-0021 SF50 15 ft fiber optic cable with no amplifier SF50 1 1 N16 7100-TE-0008 14700-XX-0022 SF50 15 ft fiber optic cable with no amplifier SF50 12 in. N16 14520-TE-0003 7010-TE-0004 14700-XX-0022 SF50 15 ft fiber optic cable with no amplif				PART NOT INCLUDED	Ť	1-1/4 in.	T20	7120-P	F-0011
Part Description 38 in. P06 14530-PF-0028 7400-TE-0036 14600-XX-0001 LF0 15 ft fiber optic cable with D10 amplifier 1460 14530-PF-0038 7400-TE-0036 14600-XX-0101 LF1 15 ft fiber optic cable with D10 amplifier 14500-XF-0004 14530-PF-0003 7400-TE-0036 14600-XX-011 LF2 25 ft fiber optic cable with D10 amplifier 14530-PF-0003 7400-TE-0004 14600-XX-011 LF2 25 ft fiber optic cable with D10 amplifier 14530-PF-0003 7400-TE-0004 14600-XX-0040 LC1 25 ft conductivity cable 11 in. P16 14530-PF-0003 7400-TE-0004 14700-XX-0021 SF50 15 ft fiber optic cable with D10 amplifier SF53 14700-XX-0023 SF52 25 ft fiber optic cable with D10 amplifier SF53 14700-XX-0023 SF52 25 ft fiber optic cable with D10 amplifier SF53 1470-TE-0004 14520-FE-0003 710-TE-0006 14700-XX-0023 SF52 25 ft fiber optic cable with D10 amplifier SF53 1470-TE-0004 11 in. N16 14520-FE-0003 7010-TE-0006 14700-XX-0023 SF52					Weldable	3/4 in.	W12	7300-P	F-0003
14600-XX-0009 LF0 15 ft fiber optic cable with no amplifier 14600-XX-0011 LF2 15 ft fiber optic cable with no amplifier 14600-XX-0011 LF2 25 ft fiber optic cable with no amplifier 14600-XX-0011 LF2 25 ft fiber optic cable with no amplifier 14600-XX-0011 LF2 25 ft fiber optic cable with no amplifier 14600-XX-0012 LF3 25 ft fiber optic cable with no amplifier 14600-XX-0040 LC1 25 ft conductivity cable Stroke Detect 12 in. N12 7100-TE-0008 14700-XX-0023 SFS0 15 ft fiber optic cable with no amplifier SFS1 14700-XX-0023 SFS2 14700-XX-0023 SFS2 25 ft fiber optic cable with no amplifier SFS1 142 in. N12 7100-TE-0008 14700-XX-0023 SFS2 25 ft fiber optic cable with no amplifier SFS3 14520-TE-0004 700-TE-0008 14700-XX-0023 SFS2 25 ft fiber optic cable with no amplifier SFS3 14700-XX-002 SFS2 15 ft fiber optic cable with no amplifier SFS3 14700-XX-0025 SFD1 15 ft fiber optic cable with no amplifier SFS1 14 in. 12 14570-PF-00	Leak Detect					1 in.	W16	7300-P	F-0004
14600-XX-0010 LF1 15 ft fiber optic cable with 101 amplifier 14600-XX-0011 LF2 25 ft fiber optic cable with 010 amplifier 14600-XX-0012 LF3 25 ft fiber optic cable with 010 amplifier 14600-XX-0012 LF3 25 ft fiber optic cable with 010 amplifier 14600-XX-0012 LF3 25 ft fiber optic cable with 010 amplifier 14600-XX-0031 LC0 15 ft conductivity cable 14600-XX-0040 LC1 25 ft conductivity cable Stroke Detect Part Description 14700-XX-0023 SF50 15 ft fiber optic cable with 010 amplifier SF50 14700-XX-0023 SF50 15 ft fiber optic cable with 010 amplifier SF50 14700-XX-0024 SF50 15 ft fiber optic cable with 010 amplifier SF50 14700-XX-0025 SF50 15 ft fiber optic cable with 010 amplifier SF50 14700-XX-0025 SF50 15 ft fiber optic cable with 010 amplifier SF50 14700-XX-0025 SF50 15 ft fiber optic cable with 010 amplifier SF50 14700-XX-0025 SF10 15 ft fiber optic cable with 010 amplifier SF10 14700-XX-0025 SF10 15 ft fiber optic cable with	Part	Descri	ption		Pillar S-300	3/8 in.	P06	14530-PF-0028	7400-TE-0036
14600-Xx-001 LF2 25 ft fiber optic cable with no amplifier 14600-Xx-001 LF2 25 ft fiber optic cable with no amplifier 14600-Xx-001 LF3 25 ft fiber optic cable with 100 amplifier 14600-Xx-004 LC1 25 ft conductivity cable Stroke Detect 11 P16 14530-PF-0003 7400-TE-0005 14700-Xx-0040 LC1 25 ft conductivity cable 11 P16 14530-PF-0003 7400-TE-0006 Stroke Detect 11 P16 14530-PF-0003 7400-TE-0006 344 in. N12 7100-TE-0006 14700-Xx-0021 SF50 15 ft fiber optic cable with no amplifier SFS1 14700-Xx-002 SF51 15 ft fiber optic cable with no amplifier SFS1 14700-Xx-0023 SF52 25 ft fiber optic cable with no amplifier SFD1 11 N16 14520-TE-0004 710-TE-0006 14700-Xx-0023 SFS2 SF1 fiber optic cable with no amplifier SFD1 11 N16 14520-FE-0003 7800-TE-0004 14700-Xx-0025 SFD1 15 ft fiber optic cable with no amplifier SFD1 11 L18 14570-PF-0004					a	1/2 in.	P08	14530-PF-0003	7400-TE-0003
14600.XX-0012 LF3 25 ft fiber orptic cable with D10 amplifier 14600.XX-0031 LC0 15 ft conductivity cable 1450.0+P-0005 110.0+P-0005 110.0+P-0005 1450.0+P-0005 110.0+P-0005 110.0+P-0005 <td< td=""><td></td><td></td><td></td><td></td><td></td><td>3/4 in.</td><td>P12</td><td>14530-PF-0004</td><td>7400-TE-0004</td></td<>						3/4 in.	P12	14530-PF-0004	7400-TE-0004
14600-XX-0031 LC0 15 ft conductivity cable 14600-XX-004 LC1 25 ft conductivity cable 14600-XX-004 LC1 25 ft conductivity cable Stroke Detect 1/2 in. N08 7100-TE-0004 14700-XX-002 SFS0 15 ft fiber optic cable with no amplifier SFS0 1/2 in. N08 14520-TE-0003 14700-XX-002 SFS1 15 ft fiber optic cable with 10 amplifier SFS1 3/4 in. N12 14520-TE-0004 14700-XX-0025 SFS2 25 ft fiber optic cable with no amplifier SFS1 3/4 in. S12 14520-TE-0008 7010-TE-0006 14700-XX-0025 SFS2 25 ft fiber optic cable with no amplifier SFS3 3/4 in. S12 14520-TE-0008 7010-TE-0006 14700-XX-0025 SFS2 25 ft fiber optic cable with no amplifier SFS3 3/4 in. S12 14570-PF-0007 7010-TE-0006 14700-XX-0025 SFS0 15 ft fiber optic cable with no amplifier SFD2 1/1 in. L16 14570-PF-0007 7000-TE-0005 14700-XX-0026 SFD0 15 ft fiber optic cable with no amplifier SFD2 3/4 in. L12					- Co	1 in.	P16	14530-PF-0005	7400-TE-0005
H400-XX-0030 LC1 25 ft conductivity cable Stroke Detect 3/4 in. N12 7100-TE-0006 Part Description 3/4 in. N12 7100-TE-0008 14700-XX-0023 SFS0 15 ft fiber optic cable with no amplifier SFS1 1/2 in. N16 7100-TE-0008 14700-XX-0023 SFS1 15 ft fiber optic cable with no amplifier SFS1 1/1 in. N16 1/2 in. S08 14520-TE-0008 7010-TE-0006 14700-XX-0023 SFS2 25 ft fiber optic cable with D10 amplifier SFS1 1/1 in. S16 14520-TE-0008 7010-TE-0008 14700-XX-0024 SFS2 25 ft fiber optic cable with D10 amplifier SFS1 1/2 in. L6 14520-TE-0008 7010-TE-0008 14700-XX-0025 SFD0 15 ft fiber optic cable with D10 amplifier SFD1 1/2 in. L6 14520-TE-0003 7010-TE-0008 14700-XX-0025 SFD0 15 ft fiber optic cable with D10 amplifier SFD2 3/4 in. L12 14570-PF-0003 7800-TE-0005 14700-XX-0025 SFD1 15 ft fiber optic cable with no amplifier SFD2 3/4 in. L12						1_1/4 in	P20	14530-PE-0009	7400-TE-0012
Instruction Instruction <thinstruction< th=""> <thinstruction< th=""></thinstruction<></thinstruction<>					ENDT				
Stroke Detect 1 N16 7100-TE-0008 Part Description 1 1 N16 7100-TE-0008 14700-XX-0021 SFS0 15 ft fiber optic cable with no amplifier SFS0 1/2 in. S01 14520-TE-0003 7010-TE-0004 14700-XX-0022 SFS1 15 ft fiber optic cable with D10 amplifier SFS1 3/4 in. S12 14520-TE-0004 7010-TE-0004 14700-XX-0023 SFS2 25 ft fiber optic cable with D10 amplifier SFS3 1/10. S16 14520-TE-0003 7800-TE-0004 14700-XX-0025 SFD0 15 ft fiber optic cable with no amplifier SFD1 1/10. L16 14570-PF-0004 7800-TE-0005 14700-XX-0025 SFD0 15 ft fiber optic cable with no amplifier SFD1 1/11. L16 14570-PF-0004 7800-TE-0005 14700-XX-0027 SFD0 15 ft fiber optic cable with no amplifier SFD1 1/11. L16 14570-PF-0004 7800-TE-0005 14700-XX-0027 SFD2 25 ft fiber optic cable with no amplifier SFD2 1/11. L16 14570-PF-0012 7800-TE-0012	14600-XX-0040	LC1	25 ft conduct	ivity cable	11911				
Part Description 12 ln. S08 14520-TE-0003 7010-TE-0006 14700-XX-002 SFS0 15 ft fiber optic cable with D10 amplifier SFS1 3/4 in. 512 14520-TE-0004 7010-TE-0006 14700-XX-002 SFS1 15 ft fiber optic cable with D10 amplifier SFS1 1/10. S16 14520-TE-0004 7010-TE-0006 14700-XX-002 SFS2 25 ft fiber optic cable with D10 amplifier SFS3 1/2 ln. S16 14520-TE-0004 7010-TE-0004 14700-XX-0025 SFD0 15 ft fiber optic cable with D10 amplifier SFD1 1/2 ln. L08 1470-PF-0003 7800-TE-0004 14700-XX-0025 SFD1 15 ft fiber optic cable with D10 amplifier SFD2 3/4 in. L12 14570-PF-0003 7800-TE-0004 14700-XX-0025 SFD1 15 ft fiber optic cable with D10 amplifier SFD2 3/4 in. L12 14570-PF-0005 7800-TE-0005 14700-XX-0025 SFD1 15 ft fiber optic cable with D10 amplifier SFD2 1.1/4 in. L20 14570-PF-0005 7800-TE-0005 14700-XX-0025 SFD1 15 ft fiber optic cable with D10 amplifier SFD2 1.1/4 in. <	01-11- D-11								
14700-XX-0021 SFS0 15 ft fiber optic cable with no amplifier SFS0 14700-XX-0022 SFS1 15 ft fiber optic cable with 100 amplifier SFS1 14700-XX-0023 SFS2 25 ft fiber optic cable with no amplifier SFS1 14700-XX-0024 SFS2 25 ft fiber optic cable with no amplifier SFS1 14700-XX-0025 SFS0 15 ft fiber optic cable with no amplifier SFS1 14700-XX-0026 SFS0 15 ft fiber optic cable with no amplifier SFS1 14700-XX-0026 SFD0 15 ft fiber optic cable with no amplifier SFD1 14700-XX-0027 SFD1 15 ft fiber optic cable with no amplifier SFD2 14700-XX-0027 SFD2 25 ft fiber optic cable with no amplifier SFD2 14700-XX-0027 SFD2 25 ft fiber optic cable with no amplifier SFD2					-				
14700-XX-0022 SFS1 15 ft fiber optic cable with D10 amplifier SFS1 14700-XX-0023 SFS2 25 ft fiber optic cable with no amplifier SFS3 14700-XX-0024 SFS3 25 ft fiber optic cable with no amplifier SFS3 14700-XX-0025 SFD0 15 ft fiber optic cable with no amplifier SFD1 14700-XX-0026 SFD0 15 ft fiber optic cable with no amplifier SFD1 14700-XX-0027 SFD0 15 ft fiber optic cable with no amplifier SFD1 14700-XX-0027 SFD0 25 ft fiber optic cable with no amplifier SFD2 14700-XX-0027 SFD0 25 ft fiber optic cable with no amplifier SFD2 14700-XX-0027 SFD2 25 ft fiber optic cable with no amplifier SFD2									
14700-XX-0023 SFS2 25 ft fiber optic cable with no amplifier SFS2 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 1111 11111 11111 1111					Flare Flare	3/4 in.	S12	14520-TE-0004	7010-TE-0004
14700-XX-0024 SFS3 25 ft fiber optic cable with D10 amplifier SFS3 112/1/L 113/1/L+P-0003 7800-TE-0004 14700-XX-0025 SFD0 15 ft fiber optic cable with D10 amplifier SFD0 3/4 in. 112 14570-P+0004 7800-TE-0004 14700-XX-0026 SFD1 15 ft fiber optic cable with D10 amplifier SFD0 11. 116 14570-PF-0005 7800-TE-0005 14700-XX-0027 SFD2 25 ft fiber optic cable with no amplifier SFD0 1.1/4 in. L02 14570-PF-0012 7800-TE-0012					0	1 in.	S16	14520-TE-0006	7010-TE-0006
14700-XX-0025 SFD0 15 ft fiber optic cable with no amplifier SFD0 PrimeLock 3/4 in. L12 14570-PF-0004 7800-TE-0005 14700-XX-0025 SFD1 15 ft fiber optic cable with no amplifier SFD1 11 in. L16 14570-PF-0005 7800-TE-0005 14700-XX-0027 SFD2 25 ft fiber optic cable with no amplifier SFD2 1-1/4 in. L20 14570-PF-0012 7800-TE-0012						1/2 in.	L08	14570-PF-0003	7800-TE-0003
14/00-XX-0025 SFD0 15 th theor optic cable with no amplifier SFD1 14/00-XX-0026 SFD1 15 ft fiber optic cable with no amplifier SFD1 14/00-XX-0027 SFD2 1.1.1 L16 14570-PF-0005 7800-TE-0005 14/00-XX-0027 SFD2 2.5 ft fiber optic cable with no amplifier SFD2 1.1.14 in. L20 14570-PF-0012 7800-TE-0012					Primel ock	3/4 in	1 12	14570-PE-0004	
14700-XX-0020 SFD1 151t tiber optic cable with D10 amplifier SFD1 1-1/4 in. L20 14570-PF-0012 7800-TE-0012				OLOOK					
14700-XX-0028 SFD3 25 ft fiber optic cable with D10 amplifier SFD3 Plugged B00 7130-TE-0003						1-1/4 In.			
	14700-XX-0028 SFD3 25 ft fiber optic cable with D10 amplifier SFD3				Plugged		B00	7130-TI	E-0003





2. Installation

2.1 Precautions

Handling

Do NOT lift pump by fiber optic cables, quick exhaust valves nor air tubing.

Installation Orientation

PFH060 pumps must be installed in an upright position. The check valves are actuated by gravity and/or flow, and they will not seat if the pump is not upright.

Timer Mode

PFH060 pumps require an end of stroke detection mechanism (pressure switch) to prevent over stroking in timer mode. Operating a PFH060 in timer mode without stroke detection will void the pump warranty.

Required Air Flow (Shuttle Valve)

PFH060 pumps require 1/4 in minimum orifice with unrestricted air flow.

Required Air Flow (Solenoid Valve)

PFH060 pumps require a 1.5 Cv solenoid. Using a reduced Cv will reduce flow rates. Using a valve with more than 20% greater Cv will change operating parameters, reduce pump life and void the warranty.

Under Supply of Air

PFH060 pumps operate erratically or stall when air supply is insufficient. Ensure use of air supply pressures higher than averaged air consumption lines in performance charts. Air supply lines and fittings must meet minimal inner diameter requirements shown in the installation instructions.

Air Supply Pressure

Operating PFH060 pumps ~35% below max air pressure may significantly extend pump life. PFH060 pumps require 20 psi minimum air pressure. Operation above 5.5 Bar (80 psi) may damage the pump and void the warranty.

Suction Lift

PFH060 pumps have an initial suction lift capacity of 3 ft. For best results minimize suction lift.

Liquid Inlet/Outlet Connections

PFH060 liquid ports are not NPT nor any other standard. Use of connectors other than those supplied by White Knight will damage the pump and void the warranty.

Liquid Line Restriction

PFH060 pumps may be controlled by closing liquid outlet lines. However, restricting liquid supply lines increases wear and should be avoided. Do NOT pump against a closed liquid inlet. It will damage the pump and void the warranty.

Running Dry

PFH060 pumps use the pumped liquid to lubricate their shafts. The pumps will cycle faster and wear more than normal when run dry, which may cause damage and loss of self-prime abilities. Standard models should not be run dry after startup and are not warrantied under dry run conditions. Dry-run capable PFHSD060 models may run dry for short periods. Warranty of dry-run models is one-year. Extended warranties are available.

Pulse Dampener with Shuttle Valve

Air supply pressure to PFH060 pumps should be at least ten psi higher than the liquid line pressure when using a pulsation dampener. Failure to do so may cause erratic operation.

Cross Contamination

PFH060 pumps use porous material that may retain chemicals. Take precautions to avoid cross contamination.





2.2 Warnings

Pressurized Material



Pumps in use contain pressurized materials. Eliminate liquid and air pressure via shut off valves before pump is serviced or removed from the system.

High Temperature



Heat may transfer to exterior surfaces when pumps operate with high temperature fluids. Avoid direct contact with the pump when high temperature fluids are present.

Hazardous Chemical



Use appropriate personal protective equipment when handling pump. Reference Material Safety Data Sheet (MSDS) for information specific to your chemicals.

Loud Noise



Pump exhaust air contributes to work area noise levels. Only operate pumps with approved muffler media, and use ear protection in noisy conditions.

2.3 Advantages

Head Pressure / Dead-Head

PFH060 pumps can be controlled by adjusting their liquid outlet pressures and can be installed with head pressures up to dead-head (e.g. equal liquid and air pressures) with no damage to the pump.

Thermal Cycling

PFH060 pumps require no maintenance when operated within their performance range, even in thermal cycling applications.

2.4 Environment & System

Oversized Inlet Line

Pumps operate optimally with liquid inlet lines larger than the liquid outlet lines. This reduces strain on the bellows and may reduce pulsation in the pump outlet.

Clean Supply Air (CDA)

PFH060 pumps require use of Class 2 air for particles and moisture per ISO 8573-1. Use 10 micron filter; maintain -40°C dew point. A point-of-use filter is recommended during first six months of operation in new fabs/systems due to high risks of debris that can damage pumps and void warranty.

Flammable Solvents

PFH060 pumps are not constructed from conductive materials. System that pump flammable solvents should be properly grounded to avoid ignition by static charge. A River's Edge test of isolative pumps with flammable liquids indicated that liquids must be grounded and other procedures should be followed. Copy of test available.

Pumping Liquids Near Boiling Point

Minimizing suction lift reduces pulsation and the potential for boiling or outgassing of liquid in the inlet of the pump. Although reciprocating pumps can pull suction lift, pump performance and life increase when suction lift is minimized or eliminated.

Abrasive Slurry

Pumping abrasive slurry may accelerate wear of components. PFH060 pumps are warrantied when used with slurry. However, normal wear is not covered by warranty.

Environmental Temperature


PFH060 pumps are rated for 0°C (32°F) -50°C (122°F) environmental temperatures. Do not freeze fluid in pump. Operation below 0°C may accelerate wear. Normal wear is not covered by warranty.





D10 amplifier must be calibrated before attaching fiber optic probes to the pump.

2.5 Installation Instructions



Set lever to up position. Slide base plate forward or pump body backward.



Insert fiber-optics fully into heads. Push in ferrule and gripper; hand-tighten nut.



Lift pump off of base plate.



Attach fittinas to pump. Tighten to 55 inch-lbs.



drilled holes.

Attach tubes and fittings

instructions. Use backer

wrench to hold fittings in

per manufacturer

place at pump.

with 3/8 in or 10 mm head

cap socket screws into pre-

Pull-back dismount is standard. See steps 3.1-3.3 for forward dismount.



Set pump on base knobs: slide it forward. Set lever to down position.




Set air line via 1/4 in FNPT ports on quick exhaust valves. Line must be 1/4 in minimum orifice.

Push-Forward Dismount **Configuration Setup**

Replace step 4 with steps 3.1-3.3 to re-configure the base plate to pushforward dismount.



Move knobs to opposite sides.



Set pump on base knobs; slide it backward.



Move lever down to locked position.

Install with Rigid Base Plate *Requires push-forward dismount configuration (steps 3.1-3.3)



Remove L bracket. Set lever in neutral (up) position.



Slide pump forward: lift it off base plate.



Fix base plate to work station. See step 4 above.



.

base plate.

Move lock lever to down position. Reattach L bracket. Tighten to 12 in-lb.

Liquid Inlet/Outlet

Liquid ports are not NPT nor any other standard. Use of connectors other than those supplied by White Knight will damage the pump.





3. Control & Monitoring


Programmable Control

White Knight CPT-1 controllers monitor and adjust run mode, flow rate, leak detection and other pump operations.



D10 Amplifier Electrical Hookups & Dimensions

White Knight recommends Expert[™] D10 amplifier for use with fiber optic stroke and leak detection assemblies.

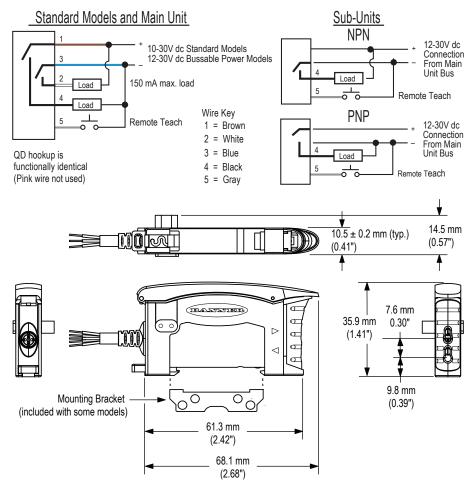




Copyright © 2023 White Knight Fluid Handling | A Graco company P: 435.783.6040 | support@wkfluidhandling.com | https://wkfluidhandling.com

.



3.1 Shift Logic for Fiber-optic Pumps

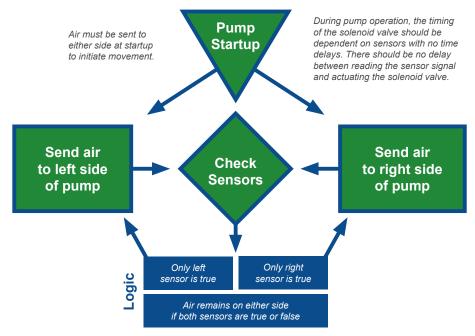






3.2 Fiber Optic Stroke Detection Installation

For standard end stroke, follow steps for both sides of the pump. For single-probe dual-detect, follow steps for only the left side.



Insert fiber optic probes fully into heads. Push in ferrule and gripper; hand-tighten nut.



Open the top and slide the front face of the D10 up. Press the fiber optic ends into the holes on its front. Slide the face down to lock cables in place.

3.3 Calibrating D10 Amplifier for Stroke Detection

When calibrating the D10 Amplifier for stroke detection, the pump should be in the same operating conditions it will be in during normal operation (i.e. supply air pressure, back pressure, etc.). The Fiber Optic must be installed as per the instructions in section 3.1.

Calibration	Calibration:						
	Push Button	Remote Line	Result				
Access Dynamic TEACH Mode	Press and hold dynamic push button >2 seconds.	Hold Remote line low (to ground) >2 Seconds.	Power LED: OFF Output LED: OFF Bar graph: LO & DO Alternately Flashing				
TEACH Sensing Conditions	 Hold push button. Operate pump normally for 15 seconds. 	Hold remote line low (to ground). Operate pump normally for 15 seconds.	Power LED: OFF Output LED: OFF Bar graph: LO & DO Alternately Flashing				
Return to	Release button	Release remote line/switch	Teach Accepted Power LED: ON Bar graph: One LED flashes to show relative contrast (successful setup requires minimum value of 4). Sensor returns to Run Mode with new settings.				
Run Mode			Teach Unaccepted Power LED: OFF Bar graph: #1, 3, 5, 7 alternately flash to show failure to sense. Sensor returns to Run mode without changing settings. Set up again if value shows <4.				

Upon completion of a successful learning cycle, the D10 Amplifier will continuously learn and self-teach to maintain the same cycle rate count readings.





3.4 Conductivity Leak Detection Installation


Leaks are identified if conductive fluid contacts a sensor. Sensor provides a Sink (NPN) or Source (PNP) signal, depending on the wire setup. See the wiring diagrams below. *Conductive leak detection does not qualify for use in explosion-proof environments. Conductive fluid required.*

See below for elbow out configuration.

Remove leak adapter from assembly.

1.

2. Replace NPT plug in "L" port with probe. Hand Tighten. Attach cable to signal translator (e.g. PLC).



3.5 Fiber Optic Leak Detection Installation

D10 amplifier must be calibrated before attaching fiber optic probes to the pump. Fiber optic sensors can melt if used at >130°C ($266^{\circ}F$), causing leak detect failure.


2

See below for elbow out configuration.




1.


Remove leak adapter and leak detect probe from fiber optic assembly.



Lower ferrule and gripper until snug against the probe. Hand tighten female gripper nut.



For straight out configuration replace NPT plug in "L" port with the probe. Hand-tighten.




Insert the fiber optic cable until it contacts the bottom of the probe.





Open the top and slide the front face of the D10 up. Press the fiber optic ends into the holes on its front. Slide the face down to lock cables in place.

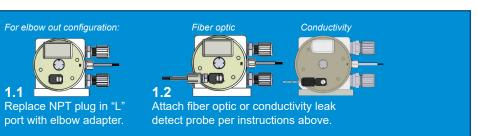

WK.

Copyright © 2023 White Knight Fluid Handling | A Graco company P: 435.783.6040 | support@wkfluidhandling.com | https://wkfluidhandling.com

Ver. 2.1.9 | 5 Dec 2023 | P. 10 Subject to change without notice



3.6 Calibrating D10 Amplifier for Leak Detection

Step 1: I	Step 1: Power On D10 Amplifier & Set "Dark Operate" Mode:					
	Push Button	Remote Line	Result			
	0.04 s ≤ "Click" ≤ 0.8 s	$0.04 \ s \le T \le 0.8 \ s$				
Access Setup Mode			 Green Power LED turns OFF. Output LED remains active. Icons continue to display current setup. Bargraph turns OFF. 			
Select Settings	Press either button until LEDs show desired settings.	Pulse the remote line until LEDs show desired settings. 	Sensor toggles through these setting combinations: LO Normal Speed No Delay (default) DO Normal Speed No Delay LO High Speed No Delay DO High Speed No Delay DO High Speed No Delay DO High Speed Delay LO Normal Speed Delay DO Normal Speed Delay LO High Speed Delay DO High Speed Delay DO High Speed Delay			
Return to Run Mode	Press and hold t both buttons >2 seconds.	Hold remote line low > 2 seconds. > 2 seconds	Green Power LED turns ON. Sensor returns to Run mode with new settings.			

Step 2: Access "Single-Point Dark Set" Mode

	Push Button	Remote Line	Result
	0.04 s ≤ "Click" ≤ 0.8 s	$0.04 \ s \le T \le 0.8 \ s$	
Access Set Mode	Press and hold static button > 2 seconds.	Single-pulse remote line	Power LED: OFF. Output LED: ON (push button) OFF (remote line) Static LEDs: LO & DO alternately flashing

Step 3: Set Sensing Condition

Set condition to "leak detection" sensing while probe tip is submerged in liquid. Then, remove the leak probe from liquid and reinserted into the "L" port. Amplifier will now signal when moisture if detected on the probe tip.

	Push Button	Remote Line	Result	
	0.04 s ≤ "Click" ≤ 0.8 s	0.04 s ≤ T ≤ 0.8 s		
Condition	Present sensing condition Five-click static button	Present sensing condition • Five-pulse remote lne	Power LED: ON. Output LED: ON (push button) OFF (remote line) Bargraph: 4 indicators flash. Sensor returns to Run mode with new sett	or 5005 ***** tings
Set Sensing	- +		Power LED: ON. Output LED: ON (push button) OFF (remote line) Bargraph: #1, 3, 5, 7 flash for failure. Sensor returns to Set sensing condition.	or

.



.



4. Ordering Instructions

3

R	equired (Default	Model)	Additional Options (Blank if not needed)
e,			*
I.	PFH060	- F12	■ - LF0 - SFD0 - TF12 -



Options 1-3 are required. Leave Additional Options blank if not desired. Only add Outlet if different than Inlet.

6

5

Rev

Default options are highlighted		
1. Pump Model		
Standard	PFH060	
Dry-Run	PFHSD060	

2

2. Check Ball Material				
PTFE Check balls	blank			
PFA Check balls	F			

3. Inlet Fitting Front straight only			
1/2 in.	F08		
3/4 in.	F12		
1 in.	F16		
1-1/4 in.	F20		
1/2 in.	T08		
3/4 in.	T12		
1 in.	T16		
1-1/4 in.	T20		
3/4 in.	W12		
1 in.	W16		
3/8 in.	P06		
1/2 in.	P08		
3/4 in.	P12		
1 in.	P16		
1-1/4 in.	P20		
1/2 in.	N08		
3/4 in.	N12		
1 in.	N16		
1/2 in.	S08		
3/4 in.	S12		
1 in.	S16		
1/2 in.	L08		
3/4 in.	L12		
1 in.	L16		
1-1/4 in.	L20		
	ht only 1/2 in. 3/4 in. 1 in. 1-1/4 in. 3/4 in. 1 in. 1/2 in. 3/4 in. 1 in. 3/4 in. 1 in. 3/4 in. 1/2 in. 3/4 in. 1/2 in. 3/4 in. 1/2 in. 3/4 in. 1 in. 1 in.		

4. Leak Detection	
No leak detection	blank
15 ft fiber optic cable with no amplifier	LF0
15 ft fiber optic cable with D10 amplifier	LF1
25 ft fiber optic cable with no amplifier	LF2
25 ft fiber optic cable with D10 amplifier	LF3
15 ft conductivity cable	LC0
25 ft conductivity cable	LC1

5. Stroke Detection		
No stroke detection	blank	
DUAL PROBE OPTIONS		
15 ft fiber optic cable with no amplifier	SFD0	
15 ft fiber optic cable with D10 amplifier	SFD1	
25 ft fiber optic cable with no amplifier	SFD2	
25 ft fiber optic cable with D10 amplifier	SFD3	
SINGLE PROBE, DUAL DETECT OPTIONS		
Single probe, dual detect, no fibers	SFS	
15 ft fiber optic cable with no amplifier	SFS0	
15 ft fiber optic cable with D10 amplifier	SFS1	
25 ft fiber optic cable with no amplifier	SFS2	
25 ft fiber optic cable with D10 amplifier	SFS3	

* Fiber optic cables ordered separately. Fiber optics are required for operation. Standard configuration includes dual probe WITHOUT fibers. See stroke detection options to order fiber optic cables or single probe option.

> Timer mode operation requires end-of-stroke detection. Use of timer mode without stroke detection voids the warranty.

Operating the pump without the included quick exhaust valves (QEVs) voids pump warranty. Customers may use their own QEVs with the optional NPT adapter.

6. Outlet F		Front	Тор
Straight only. Select Top or Front.		FION	юр
Same as Inlet		blank	n/a
Flaretek	1/2 in.	FF08	TF08
Compatible	3/4 in.	FF12	TF12
Sec.	1 in.	FF16	TF16
	1-1/4 in.	FF20	TF20
Tube Out	1/2 in.	FF08	TT08
	3/4 in.	FF12	TT12
	1 in.	FF16	TT16
	1-1/4 in.	FF20	TT20
Weldable	3/4 in.	FW12	TW12
	1 in.	FW16	TW16
Pillar S-300	3/8 in.	FP06	TP06
CO2	1/2 in.	FP08	TP08
	3/4 in.	FP12	TP12
	1 in.	FP16	TP16
	1-1/4 in.	FP20	TP20
FNPT	1/2 in.	FN08	TN08
0	3/4 in.	FN12	TN12
	1 in.	FN16	TN16
Synchro-	1/2 in.	FS08	TS08
Flare	3/4 in.	FS12	TS12
-0 ₀	1 in.	FS16	TS16
PrimeLock	1/2 in.	FL08	TL08
Con	3/4 in.	FL12	TL12
Co Co	1 in.	FL16	TL16
	1-1/4 in.	FL20	TL20

Revision

No revision	blank
Contact support for revision or copy exact code activation	n
details. Configured part num	
are not Conv Exact Part Nu	mhers

support@wkfluidhandling.com





5. Pump Service

Pumps fully rebuilt by White Knight, certified rebuilders, or technicians certified by White Knight receive full warranty renewal. Details below.

White Knight Rebuilds

Request factory rebuilds by web form at: https://wkfluidhandling.com/support/rma/. An RMA# will be provided after processing.

*Customers must follow decontamination instructions in Section 4.4 when returning a pump to White Knight.

Rebuild Pump as Certified Technician


Certified Rebuilders

White Knight's global network of certified rebuilders expedite rebuild turn-around time and minimize shipping costs. Find certified rebuilders at: https://wkfluidhandling.com/rebuilders/

White Knight offers trainings to certify technicians to rebuild pumps. Technicians who pass the training are issued a two-year certification. During the two years, parts in pumps rebuilt by the technician receive a full warranty. See: https://wkfluidhandling.com/virtual-rebuilds/

5.1 Rebuild Kits & Parts

Rebuild kit for PFH060 is RBPFH060-1. Rebuild kit for PFHSD060 is RBPFHSD060-1 (labor not included). To request rebuilds by White Knight, use RBPFH060-5 or RBPFHSD060-5, respectively (labor included).

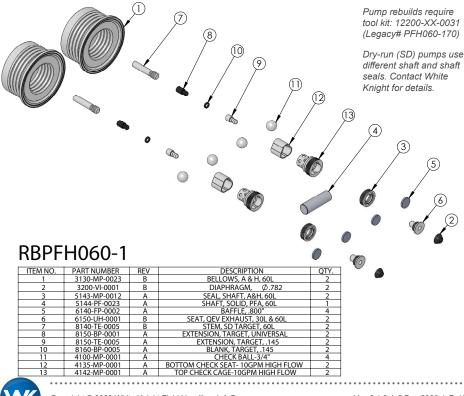



Copyright © 2023 White Knight Fluid Handling | A Graco company P: 435.783.6040 | support@wkfluidhandling.com | https://wkfluidhandling.com Ver. 2.1.9 | 5 Dec 2023 | P. 13 Subject to change without notice



5.2 Return Pump for Service

Follow decontamination instructions when returning a pump for service.

DO NOT REMOVE PAGE FROM MANUAL.

Copy page from manual or download at https://wkfluidhandling.com/support/rma/.

Decontamination Instructions

PRINT COMPLETED DECONTAMINATION CERTIFICATION. IT MUST BE INCLUDED IN YOUR RMA SHIPMENT.

White Knight products are designed for use with caustic and otherwise dangerous liquids. Handle every product as if it contains dangerous chemicals whether or not it actually does.

- · Only those with adequate safety training should attempt to handle used pumps.
- Wear adequate safety gear appropriate for chemicals that have been in the pump.
- Review relevant Material Safety Data Sheets (MSDS) before handling the pump.
- · Review emergency numbers for use in event of an accident.
- Prepare Ph papers, showers, antidotes, clean-up equipment, neutralizers, and other safety devices
 used to detect, neutralize or minimize effects of chemicals described in appropriate MSDS documents.

Rinse with DI Water

Circulate DI water through pump for twenty minutes before disassembly and/or double bagging for shipment. If pump is nonfunctional, force DI water from inlet through outlet for 40 minutes before shipment preparations.

Remove Pump from Station:

- 1. Disconnect liquid tubing connectors from front of pump (opposite shuttle valve).
- Plug NPT fittings with PTFE plug, Flare fittings with flare nose cover and cap, another plug as can be recommended by connected symplet
- or other plug or cap as recommended by connector supplier.Disconnect air supply tubing from face of shuttle valve.
- Loosen mount screw from base plate. (Note: do not remove screw from base plate).
- Remove base plate using proper tool for the fastening devices (e.g. Allen wrench or screw driver). Note: Base plate may stay if needed for replacement pump to be used.
- 6. Return all removed parts to the pump.

Return Pump to White Knight:

- 1. Rinse pump with DI water as described above after removing it from its station.
- 2. Drain remaining DI water from the pump inlet and outlet liquid tubing connectors.
- 3. Plug liquid outlets as described in the Remove Pump from Station section above.
- 4. Dry the pump, double bag it, and seal it in thick polyethylene bags.
- 5. Return the pump to its original packaging.
- 6. Include MSDS for the chemical that the pump was handling in the box with the pump.
- 7. Obtain RMA number from White Knight and write it on the outside of the box.
- 8. Ship to White Knight following all rules, regulations and laws regarding shipment of dangerous materials. Ship freight pre-paid. No collect shipments will be accepted. Unauthorized use of White Knight shipping accounts will result in the adding of freight to the bill in addition to a service charge.

Include All Pump Components:

Pumps returned to White Knight for evaluation, service or repair must be complete with all components, including but not limited to base plate, mount screws, tubing connectors, tubing connector caps, flare noses, shuttle valves, mufflers, and tubing. Missing parts will be added to the pump and charged to the customer.





DO NOT REMOVE PAGE FROM MANUAL.

Copy page from manual or download at https://wkfluidhandling.com/support/rma/.

Decontamination Certification

COMPLETE AND PRINT THIS FORM. IT MUST BE INCLUDED IN YOUR RMA SHIPMENT.

I, the undersigned employee of decontamination and safety procedures de been followed for return of product below.	escribed in Deconta	mination Instructio	_, certify that all ns section have	
RMA#:				
(We cannot process returns without an RMA num			_	
Serial#:				
(We cannot process returns without a product set			_	
Metal Exposure: (Check all that apply. Write in other metals if nece	essary.)			
Product was used in a Metal Process.	Yes No			
Product was used in a <u>Copper</u> Metal P	rocess. 🗖 Yes	🗖 No		
Product was used with:				
	Lead Nickel		Silver Tin	Titanium
Chemical Exposure: (Check all that apply. Write in other chemicals if r	necessary.)			
Product was <u>NOT</u> used in chemicals (E	DI Water only).			
Product was used in chemicals.				
; _	Hydrochloric Acid	Hydrofluoric Acid	_ , 0	
Shipping Information:	the product has been	an avpased by class	arty and conspicus	auchy

Please indicate metal processes to which the product has been exposed by clearly and conspicuously labeling the outside of the return package with the metal.

Products exposed to Metal Processes	
must be sent to the following address:	

Products <u>NOT</u> exposed to Metal Processes must be sent to the following address:

White Knight Fluid Handling 187 East 670 South, Suite B Kamas, UT 84036

Print Name: _____

White Knight Fluid Handling 187 East 670 South, Suite C Kamas, UT 84036

 Signature:
 Date:

 Copyright © 2023 White Knight Fluid Handling | A Graco company
 Ver. 2.1.9 | 5 Dec 2023 | P. 15

 P: 435.783.6040 | support@wkfluidhandling.com | https://wkfluidhandling.com
 Subject to change without notice





6. Warranty

White Knight follows strict manufacturing, assembly and testing procedures to ensure consistency and reliability.

White Knight warrants PFH060 pumps and components are free from defects in materials and workmanship for two years from our shipment date or your installation date if provided within 90 days of shipment from our facility.

Failures due to normal wear, misuse, abuse or unauthorized disassembly nullify this warranty.

White Knight does not guarantee the suitability of products for specific applications. White Knight is not liable for any damage or expense resulting from use or misuse of its products in any application. Responsibility is limited solely to repair or replacement of defective products or components.

Prior written, faxed or emailed approval must be obtained from White Knight before returning any product or component for warranty consideration. All determinations regarding cause of failure are made by White Knight, and all decisions regarding warranty fulfillment or nullification are made by White Knight.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, INCLUDING ANY GUARANTEE OF SUITABILITY FOR ANY PURPOSE. NO VARIATIONS OF THIS WARRANTY SHALL BE HONORED NOR CONSIDERED LEGALLY BINDING, EXCEPT WRITTEN AGREEMENTS SIGNED BY THE CEO OF WHITE KNIGHT FLUID HANDLING.

Accessories

See ordering instructions or contact us for details.

Stroke Detection

- Fiber Optic stroke detection with or without sensor
- Solid state pressure switch
- Solid state dual pressure switch

Leak Detection

- Fiber Optic leak detection
- with or without sensor
- · Conductivity leak detection

CPT-1

· Control/monitor run mode and flow rate.

Catcher™ Pre-Filters

- · In-line and pump-mounted options
- Large through holes to avoid loading
- Filter may be removed without removing the Catcher™ from the pump or the line.
- Pumps damaged by passing solids that use a Catcher™ are repaired as in warranty.

Filter Housing

- 100% non-metallic
- Allows for filter changing without disconnecting the inlet/outlet lines
- Rated for temperatures up to 210°C
- Install with industry standard connections
- Designed to allow for thermal cycling
- Upright and inverted installation options

Quick Exhaust Valves

 Allows for immediate escape of exhaust air reducing pulsation and exposure of solenoid valve to corrosive fumes

- In-line and pump-mounted options
- UHMW-PE design
- · Comes standard with a one-year warranty

Pulse Dampeners


- Uses same CDA as supplied to pump
- In-line and pump-mounted options
- Sizes available for all PFH Series pumps
- Self-adjusting, Auto-Level Valve is regulated by liquid line pressure











CE MARKING SPECIALISTS Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong

CERTIFICATE & DECLARATION OF CONFORMITY FOR CE MARKING

Company contact details: White Knight Fluid Handling Inc. 187 E. 670 S., Kamas, Utah, 84036, USA

White Knight Fluid Handling Inc. declares that their:

Bellows Pump Line

PSA030, PSA060, PSA140, PSH030, PSH060, PSH140, PSU030, PSU060, PSU140, PSA015, PSR050, PSR025, PFA030, PFA060, PFA140, PFH030, PFH060, PFH140, PFU030, PFU060, PFU140, PXA030, PXA060, PXA140, PXH030, PXH060, PXH140, PXU030, PXU060, PXU140, PFA015, LHA015, LHA030, LHA070

Diaphragm Pump Line (Non Conductive) PSD04TE, PSD06TE, PSD08TE, PSD16TE, PSD24TE, PSD04UH, PSD06UH, PSD08UH, PSD16UH, PSD24UH, PSB100

Diaphragm Pump Line (Conductive) PSD04TC, PSD06TC, PSD08TC, PSD16TC, PSD24TC, PSD04UC, PSD06UC, PSD08UC, PSD16UC, PSD24UC

Legacy Pump Line PLS30, PLS60, PLS120, PLX30, PLX60, PLX120, PX30, PX60, PX120, PLF30, PLF60, PLF120

> Metering Pumps PPM100, PEM100, PEM050

> Plastic Pumps PHC40-2, PPMC300, PPMA

TPA07 Pressure Transducer

are classified within the following EU Directives as applicable:

Machinery Directive 2006/42/EC Low Voltage Directive 2014/35/EU Electromagnetic Compatibility Directive 2014/30/EU RoHS 2 Directive 2011/65/EU

and further conform with the following EU Harmonized Standards as applicable: EN 809;1998+A1;2009 EN 60204-1;2006 + A1;2009 EN 61000-6-2;2005 EN 61000-6-4;2007+A1;2011

Dated: 16 January 2017 Position of signatory: Product Manager Name of Signatory: Cory Ammon Simmons Signed below: on behalf of White Knight Fluid Handling Inc.





White Knight Support

187 E. 670 S. Kamas, UT 84036

Phone: 435.783.6040 Toll Free: 888.796.2476 Fax: 435.783.6128

support@wkfluidhandling.com

https://wkfluidhandling.com/support/



Part No. 18200-LM-0015

.