
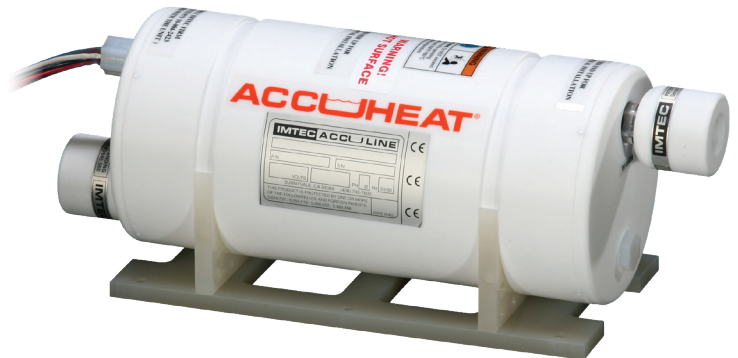


Accuheat Single-Tube Configuration

Options in the example are highlighted below.

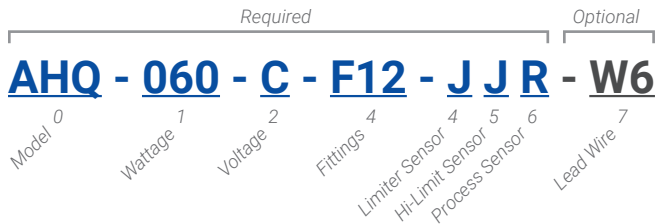



Configuration Options

0. Model	
Accuheat Quartz Single-Tube Heater	AHQ

1. Wattages <i>*Dependent on voltage</i>	
3.0 kW	030
4.5 kW	045
6.0 kW	060
9.0 kW	090
12.0 kW	120

2. Voltages <i>*Dependent on wattage</i>	
208 VAC, 1-PH.	C
240 VAC, 1-PH.	F
208 VAC, 3-PH.	N
400 VAC, 3-PH.	W
480 VAC, 3-PH.	V

3. Fittings		
3/4-in Flare <i>*includes Imtec nuts</i>		F12
19M Stem		R12

4. Limiter Sensor <i>(for Power Modulator)</i>	
Type J Thermocouple	J

5. Hi-Limit Sensor	
Type J Thermocouple	J

6. Process Sensor <i>*Other sensors available at request</i>	
RTD, 100 Ohms	R

7. Lead Wire <i>*Standard Lead Wires are 10-ft.</i>	
10-ft Leads	<i>blank</i>
20-ft Leads	W6

Wattage & Voltage Compatibility

Base Model	kW	Voltages (VAC)				
		208 (1Ø)	240 (1Ø)	208 (3Ø)	400 (3Ø)	480 (3Ø)
AHQ-030	3.0	✓	✓	-	-	-
AHQ-045	4.5	✓	✓	✓	✓	-
AHQ-060	6.0	✓	✓	✓	✓	-
AHQ-090	9.0	-	-	✓	✓	-
AHQ-120	12.0	-	-	-	✓	✓

Accessories

Description	Part Number
Standard Power Modulator	10-000-2366
Power Modulator for Hot Phosphoric	10-000-2367
Spare Fit-One Nut (ea.)	10-004-2423

Configuration Examples

Configuration	Model	Wattage	Voltage	Fittings	Limiter Sensor	Hi-Limit Sensor	Process Sensor	Lead Wire
AHQ-030-F-F12-JJR	AHQ	030 3.0 kW	F 240 VAC, 1-PH.	F12 3/4-in Flare	J Type J T/C	J Type J T/C	R RTD, 100 Ohms	- 10-ft Leads
AHQ-090-W-R12-JJR	AHQ	090 9.0 kW	W 400 VAC, 3-PH.	R12 19M Stem	J Type J T/C	J Type J T/C	R RTD, 100 Ohms	- 10-ft Leads
AHQ-090-W-R12-JJR-W6	AHQ	090 9.0 kW	W 400 VAC, 3-PH.	R12 19M Stem	J Type J T/C	J Type J T/C	R RTD, 100 Ohms	W6 20-ft Leads