

In-line Configuration


DBA 030 - I030- P12 - LFO- P08

0. Model 1. Size 2. Mount 3. Inlet 4. Leak Detect 5. Outlet

Pump-Mounted

DBA 030 - T030 - LFO

0. Model 1. Size 2. Mount 4. Leak Detect

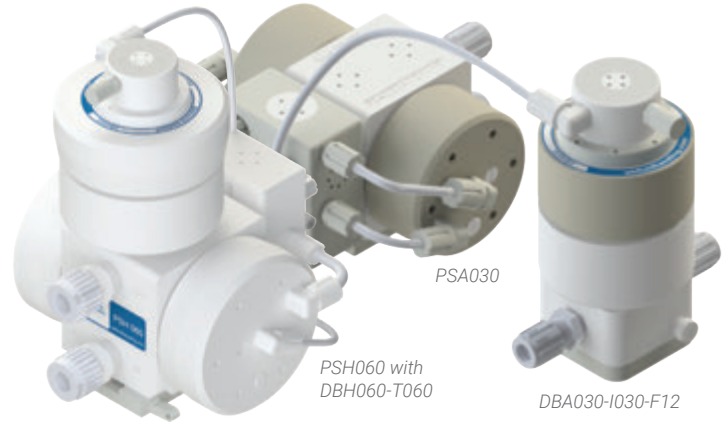

PSA030

PSH060 with DBH060-T060

DBA030-I030-F12

0. Model	
Maximum fluid temperature	
≤ 100°C (212°F)	DBA
≤ 145°C (293°F)	DBH
≤ 210°C (410°F)	DBU



DBA are for PSA, PFA, PXA pumps.
 DBH are for PSH, PFH, PXH pumps.
 DBU are for PSU, PFU, PXU pumps.

1. Size	
Size of internal bellows	
30 lpm bellows	030
60 lpm bellows	060
140 lpm bellows	140



Size Compatibility

2. Mount		030	060	140
In-Line	30 lpm base	I030	✓	✓
	60 lpm base	I060	✓	✓
	140 lpm base	I140	-	✓
Pump-Mount	030 adapter	T030	✓	✓
	060 adapter	T060	✓	✓
	140 adapter	T140	-	✓
	PA060 adapter	A060	✓	✓
	PA140 adapter	A140	-	✓



Liquid Fittings		3. Inlet	Mount Compatibility			
		5. Outlet	I030	I060	I140	
<i>Only define outlet if different</i>						
Plugged		B00	✓	✓	✓	
	Flaretek Compatible	1/4 in	F04	✓	-	-
		3/8 in	F06	✓	-	-
		1/2 in	F08	✓	✓	✓
		3/4 in	F12	✓	✓	✓
		1 in	F16	-	✓	✓
1-1/4 in		F20	-	✓	✓	
Pillar S-300	1/4 in	P04	✓	-	✓	
	3/8 in	P06	✓	✓	-	
	1/2 in	P08	✓	✓	✓	
	3/4 in	P12	✓	✓	✓	
	1 in	P16	✓	✓	✓	
	1-1/4 in	P20	-	✓	✓	
PrimeLock	1/4 in	L04	✓	-	-	
	3/8 in	L06	✓	-	-	
	1/2 in	L08	✓	✓	-	
	3/4 in	L12	✓	✓	✓	
	1 in	L16	-	✓	✓	
	1-1/4 in	L20	-	✓	✓	
FNPT	1/4 in	N04	✓	-	-	
	3/8 in	N06	✓	-	-	
	1/2 in	N08	✓	✓	✓	
	3/4 in	N12	✓	✓	✓	
	1 in	N16	-	✓	✓	
	1-1/4 in	N20	-	-	✓	
Tube Out	3/8 in	T06	✓	-	-	
	1/2 in	T08	✓	✓	-	
	3/4 in	T12	✓	✓	✓	
	1 in	T16	-	✓	✓	
	1-1/4 in	T20	-	✓	✓	
	1-1/2 in	T24	-	-	✓	
Weldable	3/4 in	W12	-	✓	✓	
	1 in	W16	-	✓	✓	

4. Leak Detection	
No leak detection	blank
15 ft fiber optic cable with no amplifier	LF0
15 ft fiber optic cable with D10 amplifier	LF1
25 ft fiber optic cable with no amplifier	LF2
25 ft fiber optic cable with D10 amplifier	LF3
15 ft conductivity cable	LC0
25 ft conductivity cable	LC1